

Heat pump bracket

Instruction & Manual



Invest Living

Gyllingsväg 9

572 36 Oskarshamn

0046 (0)491 40 30 00

www.investliving.se

Installation:

Step 1

Combine Support 1 with Support 2 with M6 bolt ⑧, M6 gaskets ⑨ and ⑦.

Step 2


Combine Support 1 with Support 3 with M6 bolt ⑧, M6 gaskets ⑨ and ⑦.

Step 3

Adjust two combined Support length, lock them with M8 coach bolt ⑩, M8 nut ⑥, and M8 gaskets ⑪ and ⑤.

Step 4


Add rubber foot ④ with support 1, adjust the height and stabilize the bracket.

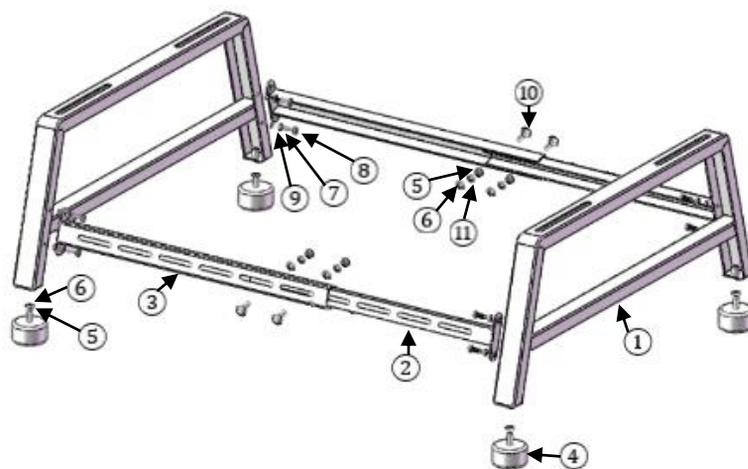

Number	Spare parts	Qty
1	Support 1	2
2	Support 2	2
3	Support 3	2
4	Rubber foot	4
5	M8 flat gasket	8
6	M8 nut	8
7	M6 flat gasket	8
8	M6 bolt	8
9	M6 Spring gasket	8
10	M8 coach bolt	4
11	M8 Spring gasket	4

Measurements:

OBS! All measurements are in mm!

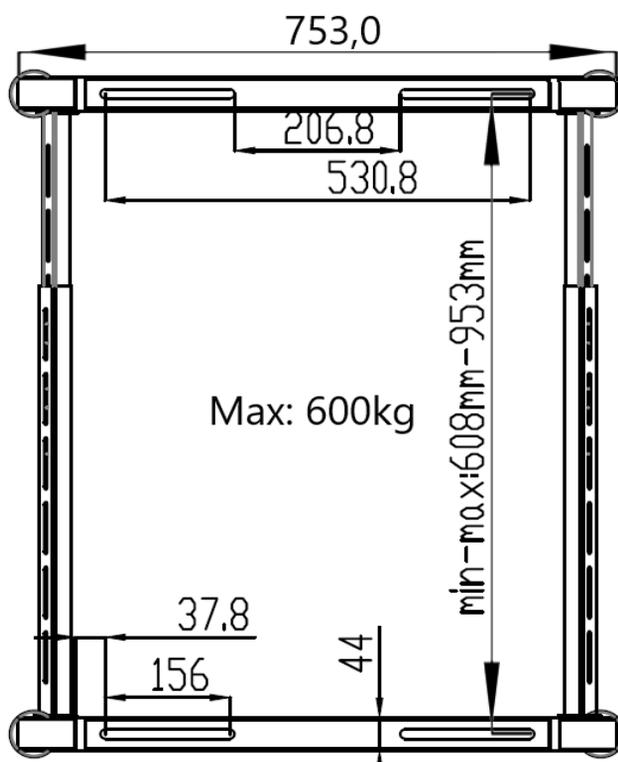

Height of the bracket is adjustable between **323mm** and **340mm** by adjusting the individual rubber feet ④.